



We Light Your World



FLOOD LIGHTS

LED FLOOD LIGHT JBJ-DFI

30w-400w

140-150LM/W Optional

5 Year

Compatible with sensing function


Complete set of accessories such as lampshade/bracket

Protection Rank : IP 65

Material: VAluminum + Pc

Power factor >0.9

Start at minus 100 degrees Celsius

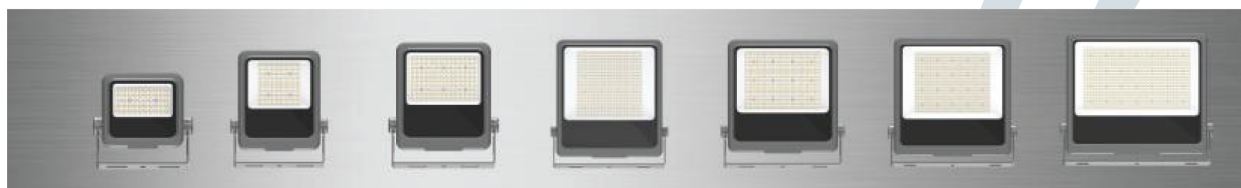

Technicat parameters:

Model	Power (± 5%)	Input Voltage	Efficiency LMW (± 5%)	CCT	Ra	Beam Angle	Product Size (mm)
JBJ-DF1	30W	AC85-265V/50/60Hz	(140-150LM/W)	3200K/6500K	≥ 80	30°、60°、90°	193*187*50
JBJ-DF1	50W	AC85-265V/50/60Hz	(140-150LM/W)	3200K/6500K	≥ 80	30°、60°、90°	231*278*50
JBJ-DF1	100W	AC85-265V/50/60Hz	(140-150LM/W)	3200K/6500K	≥ 80	30°、60°、90°	253*290*56
JBJ-DF1	150W	AC85-265V/50/60Hz	(140-150LM/W)	3200K/6500K	≥ 80	30°、60°、90°	326*342*56
JBJ-DF1	200W	AC85-265V/50/60Hz	(140-150LM/W)	3200K/6500K	≥ 80	30°、60°、90°	365*402*62
JBJ-DF1	300W	AC85-265V/50/60Hz	(140-150LM/W)	3200K/6500K	≥ 80	30°、60°、90°	430*438*62
JBJ-DF1	400W	AC85-265V/50/60Hz	(140-150LM/W)	3200K/6500K	≥ 80	30°、60°、90°	500*438*66

30w-400w
 140~150LM/W Optional
 5 Year
 Compatible with sensing function
 Complete set of accessories such as lampshade/bracket
 Protection Rank : IP 65
 Material: Aluminum + Pc
 Power factor >0.9
 Start at minus 100 degrees Celsius



Technicat parameters:

Model	Power (± 5%)	Input Voltage	Efficiency LMW (± 5%)	CCT	Ra	Beam Angle	Product Size (mm)
J B-Y 30	30W	AC 85-265V /50/60Hz	AC 80-100V	3000K /4500K /7000K	≥ 80	120°	137.3*117.3*25
J B-Y 50	50W	AC 85-265V /50/60Hz	AC 80-100V	3000K /4500K /7000K	≥ 80	120°	167.6*147.6*25
J B-Y 100	100W	AC 85-265V /50/60Hz	AC 80-100V	3000K /4500K /7000K	≥ 80	120°	208*183*25
J B-Y 150	150W	AC 85-265V /50/60Hz	AC 80-100V	3000K /4500K /7000K	≥ 80	120°	233.75*203.75*25
J B-Y 200	200W	AC 85-265V /50/60Hz	AC 80-100V	3000K /4500K /7000K	≥ 80	120°	273.45*233.45*27
J B-Y 300	300W	AC 85-265V /50/60Hz	AC 80-100V	3000K /4500K /7000K	≥ 80	120°	323.45*273.4*27
J B-Y 400	400W	AC 85-265V /50/60Hz	AC 80-100V	3000K /4500K /7000K	≥ 80	120°	353.45*303.45*30



Product Name

اسم المنتج

LED FLOOD LIGHT BLACK

Specification

المواصفات

- 110 Lumen per Watt Output
- 6500K Color Temperature
- Toughened Glass
- Heavy Duty Die-Cast Aluminum Housing

- 110 ليومن لكل وات
- درجة اللون 6500 كلفن (إضاءة بيضاء)
- زجاج حراري
- جسم مصنوع من الألومنيوم يتحمل الاجهادات

Product Name	LED Flood Light	الكشاف
Model	CMC-F001-B	الموديل
Power	50 - 100 - 150 - 200 - 300 - 400 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	110 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
IP	65	IP
Warranty	3 Year	الضمان



Product Name

اسم المنتج

LED FLOOD LIGHT

Specification

المواصفات

- 90 Lumen per Watt Output
- 6500K Color Temperature
- Toughened Glass
- Heavy Duty Die-Cast Aluminum Housing

- ٩٠ ليومن لكل وات
- درجة اللون ٦٥٠٠ كلفن (إضاءة بيضاء)
- زجاج حراري
- جسم مصنوع من الألومنيوم يتحمل الاجهادات

Product Name	LED Flood Light	الكشاف
Model	CMC-F002-1	الموديل
Power	50 - 100 - 150 - 200 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	90 Lm/w	الكفاءة
CRI	70	معامل تمييز اللون
IP	65	IP
Warranty	1 Year	الضمان



Product Name

اسم المنتج

LED FLOOD LIGHT WHITE

Specification

المواصفات

- 115 Lumen per Watt Output
- 6500K Color Temperature
- PC Lens
- Heavy Duty Die-Cast Aluminum Housing

- 110 ليومن لكل وات
- درجة اللون 6500 كلفن (إضاءة بيضاء)
- عدسة بولي كربونيت
- جسم مصنوع من الألومنيوم يتحمل الاجهادات

Product Name	LED Flood Light	الكشاف
Model	CMC-F002-W	الموديل
Power	50 - 100 - 150 - 200 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	115 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
IP	65	IP
Warranty	3 Year	الضمان



TRI PROOF



Model	Power	Dimension (L*W*H)	Material	NOTICE
SSY-L984-600mm	9W (Tube Type) Single	L660*W82*H90mm	Plastic(ABS+PS\ABS+PC/PC)	Package Shrinking or Inner Box
SSY-L983-1200mm	18W (Tube Type) Single	L1200*W74*H90mm	Plastic(ABS+PS\ABS+PC/PC)	Package Shrinking or Inner Box
SSY-L981-1200mm	18W*2 (Tube Type) Double	L1265*W120*H90mm	Plastic(ABS+PS\ABS+PC/PC)	Package Shrinking or Inner Box
SSY-L986A-1200mm	SMD 2835 18W Single	L1270*W70*H90mm	Plastic(ABS+PS\ABS+PC/PC)	Package Shrinking or Inner Box
SSY-L986-1200mm	SMD 2835 36W Double	L1265*W120*H90mm	Plastic(ABS+PS\ABS+PC/PC)	Package Shrinking or Inner Box



Model	Power	Dimension (L*W*H)	Material	NOTICE
SSY-L807-600mm	20-40W	L600*W60*25mm	Iron/Alum(with Oxidation)+PC Diffuser+Caps(ABS)	Package Shrinking or Inner Box
SSY-L807-1200mm	54-60W	L1200*W60*25mm	Iron/Alum(with Oxidation)+PC Diffuser+Caps(ABS)	Package Shrinking or Inner Box



Model	Power	Dimension (L*W*H)	Material	NOTICE
SSY-L805-600mm	36-50W	L530mm*W55*H42mm	Alum(with Oxidation)+PC Diffuser+Caps(ABS)	Package Shrinking or Inner Box
SSY-L805-1200mm	72-80W	L1130mm*W55*H42mm	Alum(with Oxidation)+PC Diffuser+Caps(ABS)	Package Shrinking or Inner Box



Model	Power	Dimension (L*W*H)	Material	NOTICE
SSY-L888Single	With/without tube	6035*90*41mm	Iron+Gril/Iron+Milky PC	Plastic Shrinking package
SSY-L886Single	With/without tube	1233*90*41mm	Iron+Gril/Iron+Milky PC	Plastic Shrinking package
SSY-L887	With/without tube	6035*125*45mm	Iron+Grille/Iron+Milky PC	Plastic Shrinking package
SSY-L885	With/without tube	1235*125*45mm	Iron+Grille/Iron+Milky PC	Plastic Shrinking package



Plant growth is also available



Promotes
Plant Growth



High
Brightness



Energy
Saving



Long
Lifespan



Power Connector



Full Spectrum Light



Fixture with Accessories




Connectors & Clips



Mounting Kit

Model	Power	Dimension (L*W*H)	Material	NOTICE
SSY-LT501-300mm	4W	L300*W23*H35mm	Alum+PC (Diffuser)/PC	With Switch or not/With Sensor or not/Wires from Middle
SSY-LT501-600mm	9W	L600*W23*H35mm	Alum+PC (Diffuser)/PC	With Switch or not/With Sensor or not/Wires from Middle
SSY-LT501-900mm	14W	L900*W23*H35mm	Alum+PC (Diffuser)/PC	With Switch or not/With Sensor or not/Wires from Middle
SSY-LT501-1200mm	18W	L1200*W23*H35mm	Alum+PC (Diffuser)/PC	With Switch or not/With Sensor or not/Wires from Middle

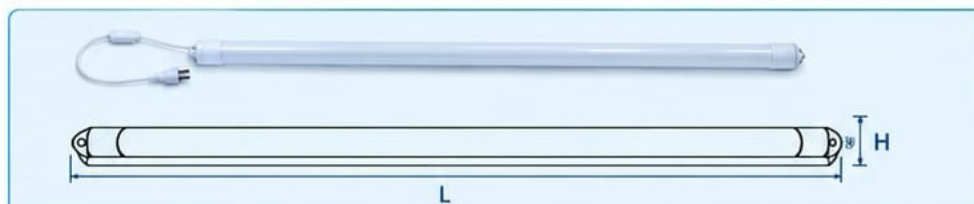

SSY-PB01 Series LED PACKAGE PLANT GROW LIGHT

Model	Power	Dimension (L*W*H)	Material	NOTICE
SSY-PB01-600mm	6W	L600*W25mm	PC	Package Shrinking
SSY-PB01-900mm	9W	L900*W25mm	PC	Package Shrinking
SSY-PB01-1200mm	12W	L1200*W25mm	PC	Package Shrinking



Model	Power	Dimension (L*W*H)	Material	NOTICE
SSY-LT801-300mm	4W	L300*W30*H40mm	Alum+PC (Diffuser)/PC	Integration(一体) / Separated Type(分体) / With Switch/With Sensor
SSY-LT801-600mm	9W	L600*W30*H40mm	Alum+PC (Diffuser)/PC	Integration(一体) / Separated Type(分体) / With Switch/With Sensor
SSY-LT801-900mm	14W	L900*W30*H40mm	Alum+PC (Diffuser)/PC	Integration(一体) / Separated Type(分体) / With Switch/With Sensor
SSY-LT801-1200mm	18W	L1200*W30*H40mm	Alum+PC (Diffuser)/PC	Integration(一体) / Separated Type(分体) / With Switch/With Sensor
SSY-LT801-1200mm	36W	L1200*W30*H40mm	Alum+PC (Diffuser)/PC	Integration(一体) / Separated Type(分体) / With Switch/With Sensor



Product Name

اسم المنتج

LED TRI PROOF ALUMINUM

Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K Color Temperature
- Extrusion Aluminum housing
- PC Cover

Product Name	LED Tri Proof Light	الكشاف
Model	CMC-TRI-AL	الموديل
Power	20 - 40 - 80 - 100 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
IP	66	درجة الحماية
Length	30 - 60 - 120 - 150 cm	الطول
Warranty	3 Year	الضمان



Product Name

اسم المنتج

LED TRI PROOF LIGHT PLASTIC

Specification

المواصفات

- 110 Lumen per Watt Output
- 6500K Color Temperature
- Extrusion PC housing
- PC Cover

Product Name	LED Tri Proof Light	الكشاف
Model	CMC-TRI-PL	الموديل
Power	20 - 40 W	القدرة
Power Factor	0.6/0.95	معامل القدرة
Lm/W	110 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
IP	65	درجة الحماية
Length	60 - 120 cm	الطول
Warranty	3 Year	الضمان



MAGNATIC



TP3001A-S3-12

CCT

OSRAM 3000k/4000k/6000k

Wattage

12W

Dimension

D95*30



TP3001A-S3-20

CCT

OSRAM 3000k/4000k/6000k

Wattage

20W

Dimension

D115*30



TP3001A-S4-20

CCT

OSRAM 3000k/4000k/6000k

Wattage

20W

Dimension

D95*30



TP3001A-S5-20

CCT

OSRAM 3000k/4000k/6000k

Wattage

20W

Dimension

D100*100



TP3001A-B1-6

CCT

BRILUX 3000k/4000k/6000k

Wattage

6W

Dimension

D35*80



TP3001A-B1-12

CCT

BRILUX 3000k/4000k/6000k

Wattage

12W

Dimension

D45*90



TP3001A-B1-18

CCT

BRILUX 3000k/4000k/6000k

Wattage

18W

Dimension

D55*110



TP3001A-B2-6

CCT

BRILUX 3000k/4000k/6000k

Wattage

10W

Dimension

D50*H400



TP3001A-B2-12

CCT

BRILUX 3000k/4000k/6000k

Wattage

20W

Dimension

D40*H400



TP3001A-B2-18
CCT
BRILUX 3000k/4000k/6000k
Wattage
30W
Dimension
D30*H400



TP3001A-1000L-D
Installation
surface mounted
Input
48V
Finish
black



TP3001A-2000L-D
Installation
surface mounted
Input
48V
Finish
black



TP3001A-3000L-D
Installation
surface mounted
Input
48V
Finish
black




TP3001A-100W-48VF
Input
48V
Wattage
100W
Dimension
L 285*W30*H 26.5mm



TP3001A-200W-48VF
Input
48V
Wattage
200W
Dimension
L 285*W30*H 26.5mm

MAGNETIC TRACK

Picture	Product Name	Product Model	Power	CRI	SIZE	Beam Angle
	MAGNETIC TRACK LIGHT	GT-20F-30	10w	≥90	L300*W22*H25	120°
	MAGNETIC TRACK LIGHT	GT-20F-60	20w	≥90	L600*W22*H25	120°
	MAGNETIC TRACK LIGHT	GT-L20S-22	12w	≥90	L220x24x86	24°
	MAGNETIC TRACK LIGHT	TP2001-S	10w	≥90	60*120	24°
	MAGNETIC TRACK LIGHT	TP2001-S	20w	≥90	60*120	24°
	LP-J20 FAT magnetic track					
	J20 RIGHT ANGLE					
	EXP- 3L Direct wired connection					
	power supply 200W					

SMART MAGNETIC TRACK




Picture	Product Name	Product Model	Power	CCT	CRI	SIZE	Beam Angle
	SMAET MAGNETIC TRACK LIGHT Tuya Bluetooth	GT-20F-30	10w	3000 - 6500	≥90	L300*22*H25	120°
	SMAET MAGNETIC TRACK LIGHT Tuya Bluetooth	GT-20F-60	20w	3000 - 6500	≥90	L600*22*H25	120°
	SMAET MAGNETIC TRACK LIGHT Tuya Bluetooth	GT-20S-33	18w	3000 - 6500	≥90	L330*22*H25	24°
	SMAET MAGNETIC TRACK LIGHT Tuya Bluetooth	GT-20S-44	24w	3000 - 6500	≥90	L440*22*H25	24°
	SMAET Spotlight Tuya Bluetooth	SY-Z5	COB-7- 12w	3000 - 6500	≥90	D82*78	24°
	SMAET Spotlight Tuya Bluetooth	SY-Z5	COB-7- 12w	3000 - 6500	≥90	D82*78	24°
	SMAET Spotlight Tuya Bluetooth	SY-Z5	COB-7- 12w	3000 - 6500	≥90	D82*78	24°
	LP-J20 magnetic track						
	J20 RIGHT ANGLE						
	EXP- 3L Direct wired connection						
	power supply 200W						



SLIM MAGNETIC TRACK

Picture	Product Name	Product Model	Power	CCT	CRI	SIZE	Beam Angle
	Floodlight	ZD0513-FG-300Y	7W	4000K	≥95	300*10.5*5.5MM	120°
	Floodlight	ZD0513-FG-450Y	12W	4000K	≥95	450*10.5*5.5MM	≥90
	Floodlight	ZD0513-FG-600Y	16W	4000K	≥95	600*10.5*5.5MM	≥90
	Grille light	ZD0513-GS-28Y	5W	4000K	≥95	205*10.5*5.5MM	120°
	Grille light	ZD0513-GS-56Y	9W	4000K	≥95	405*10.5*5.5MM	≥90
	Adjustable Grille Light	ZD0513-KTGS-6Y	6W	4000K	≥95	120*10.2*4.8MM	24°
	Adjustable Grille Light	ZD0513-KTGS-12Y	11W	4000K	≥95	236*10.2*4.8MM	24°
	Floodlight	ZD0513-GDTJ-15Y	2W	4000K	≥95	15*37.5MM	24°
	Track light	ZD0513-GD-18Y	2W	4000K	≥95	18*40MM	24°
	Track light	ZD0513-GD-355Y	5W	4000K	≥95	30*68MM	24°
	Track light	ZD0513-GD-357Y	9W	4000K	≥95	35*110MM	COB-7-12w
	Track light	ZD0513-GD-322Y	3W	4000K	≥95	23*100*H33MM	COB-7-12w
	Track light	ZD0513-GD-323Y	3W	4000K	≥95	32.5*100*H39.5MM	COB-7-12w
	Track light	ZD0513-GD-325Y	3W	4000K	≥95	33*100*H39.5MM	COB-7-12w
	Track light	ZD0513-GD-60Y	6W	4000K	≥95	60*60MM	COB-7-12w

Picture	Product Name	Product Model	Power	CCT	CRI	SIZE	Beam Angle
	Track light	ZD0513-GD-352Y	2*3W	4000K	≥95	20*135*H59MM	120°
	Track light	ZD0513-GD-353Y	3*3W	4000K	≥95	30*185*H59MM	≥90
	Chandelier	ZD0513-CD-325Y	3W	4000K	≥95	33*100*H39.5MM	≥90
	Chandelier	ZD0513-CD-323Y	3W	4000K	≥95	32.5*100*H39.5MM	120°
	Soft silicone light strip	ZD0513-GJ-100	7.5W	4000K	≥95	L1000*W39*H14mm	≥90

MAGNETIC TRACK LIGHT

Picture	Product Model	Power	CCT	CRI	SIZE	Beam Angle
	TP2601A-C1-12	12W	4000K	≥90	L230*26*24	24°
	TP2601A-C1-18	18W	4000K	≥90	L338*26*24	24°
	TP2601A-F1-12	12W	4000K	≥90	L230*26*24	150°
	TP2601A-F1-18	18W	4000K	≥90	L315*26*24	150°
	TP2601A-D1-12	12W	4000K	≥90	L236*53*26	24°
	TP2601A-S1-5	5W	4000K	≥90	D46*120	24°
	TP2601A-S1-10	10W	4000K	≥90	D56*128	24°
	magnetic track TP2601A					
	magnetic track TP2601B					
	TP2601A-100W-48VF power supply	100W				
	TP2601A-200W-48VF power supply	200W				
	TP2601A-4	Direct connection				
	TP2010A-C1-12	12W	4000K	≥90		24°
	TP2010A-C1-18	18W	4000K	≥90		24°
	TP2010A-F1-12	12W	4000K	≥90		150°
	TP2010A-F1-18	18W	4000K	≥90		150°
	TP2010A-D1-12	12W	4000K	≥90		24°
	TP2010A-D1-18	18W	4000K	≥90		24°

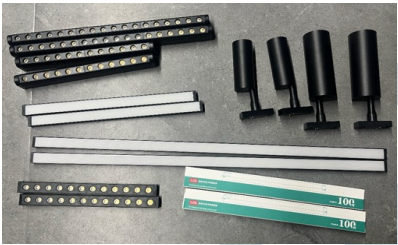Picture	Product Model	Power	CCT	CRI	SIZE	Beam Angle
	TP2010A-S1-5	7W	4000K	≥90		24°
	TP2010A-S1-10	12W	4000K	≥90		24°
	TP2010 - 48VF power supply	100W				
	magnetic track TP2010A					
Picture	Product Model	Power	CCT	CRI	SIZE	CHIP
	TP1601C-S23	3W	4000K	≥90	30*25MM	OSRAM
	TP1601C-S24	7W	4000K	≥90	100*40MM	OSRAM
	TP1601C-S25	7W	4000K	≥90	45*80MM	OSRAM
	TP1601C-S26	7W	4000K	≥90	45*80MM	OSRAM
	TP1601C-S27	3W	4000K	≥90	30*70MM	OSRAM
	TP1601C-S28	3W	4000K	≥90	35*60MM	OSRAM
	TP1601C-S29	3W	4000K	≥90	35*65MM	OSRAM
	TP1601-T magnetic track				2M	
	TP1601-S	7.5W/M	4000K	≥90	4M	OSRAM
	TP1601-80W-48VF	80W				




WALL WASHER



TP3001A-F1-10
CCT
OSRAM2835 3000k/4000k/6000k
Wattage
10W
Dimension
L300*W30*H30



TP3001A-F1-20
CCT
OSRAM2835 3000k/4000k/6000k
Wattage
20W
Dimension
L600*W30*H30

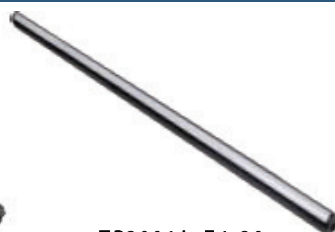


TP3001A-F1-30
CCT
OSRAM2835 3000k/4000k/6000k
Wattage
30W
Dimension
L900*W30*H30



TP3001A-C1-12
CCT
OSRAM 3000k/4000k/6000k
Wattage
12W
Dimension
L236*W30*H30



TP3001A-C1-18
CCT
OSRAM 3000k/4000k/6000k
Wattage
18W
Dimension
L346*W30*H30

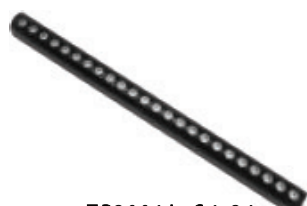

TP3001A-C1-24
CCT
OSRAM 3000k/4000k/6000k
Wattage
24W
Dimension
L440*W30*H30



TP3001A-D1-12
CCT
OSRAM 3000k/4000k/6000k
Wattage
12W
Dimension
L236*W30*H45



TP3001A-D1-18
CCT
OSRAM 3000k/4000k/6000k
Wattage
18W
Dimension
L346*W30*H45



TP-2401A-C2-6
Wattage 6W
CCT
OSRAM 3000K /4000K /6000K
CRI >90
Protectionlevel IP20
Materiel die-cast A luminum
Dimension L 120*W 24*H 26 mm
Track used Ultra-thin track



TP-2401A-C2-12
Wattage 12W
CCT
OSRAM 3000K /4000K /6000K
CRI >90
Protectionlevel IP20
Materiel die-cast A luminum
Dimension L 236*W 24*H 26 mm
Track used Ultra-thin track



TP-2401A-C1-6
Wattage 6W
CCT
OSRAM 3000K /4000K /6000K
CRI >90
Protectionlevel IP20
Materiel die-cast A luminum
Dimension L 120*W 24*H 26 mm
Track used Ultra-thin track



TP-2401A-C1-12
Wattage 12W
CCT
OSRAM 3000K /4000K /6000K
CRI >90
Protectionlevel IP20
Materiel die-cast A luminum
Dimension L 236*W 24*H 26 mm
Track used Ultra-thin track



TP-2401A-D2-3
Wattage 6W
CCT
OSRAM 3000K /4000K /6000K
CRI >90
Protectionlevel IP20
Materiel die-cast A luminum
Dimension L 120*W 24*H 26 mm
Track used Ultra-thin track



TP-2401A-D1-6
Wattage 12W
CCT
OSRAM 3000K /4000K /6000K
CRI >90
Protectionlevel IP20
Materiel die-cast A luminum
Dimension L 236*W 24*H 26 mm
Track used Ultra-thin track

2. 8W LED FLOOD LIGHT

General Information

Product Name	36W Wall Washer Light
Product Size	1000 * 25.5 * 40 mm
Range of Application	Building Lighting. Backlighting of various sizes of planes, etc.

Lighting Resource





LED Model / Chip	OSRAM / PHILIPS
Power	24 pcs * 1.5 W = 36 W
Color Temperature	3000 K
Light Efficiency	W:130 lm/w

Fixture & Electrical Equipment

Beam Angle	20 * 30
Body Material / Color	Aluminum, Sand gray
Lamp Lens Material / Color	-----
IP Class	65
Rated Power	36 W
Light Output Ratio (LOR)	85 lm/w
Input Voltage	DC 24V
Installation Way	Non-integration
Power Factor	1
Definition / Control	4
Adjusted Angle	180°

Control & Packaging

Control & Others	DMX 512 / DC24V
Product Weight	0.76 kg
Package Type	K=A
Packing Size / Quantity	102 * 31 * 26 cm 20pcs/CTN
Gross Weight	17 kg

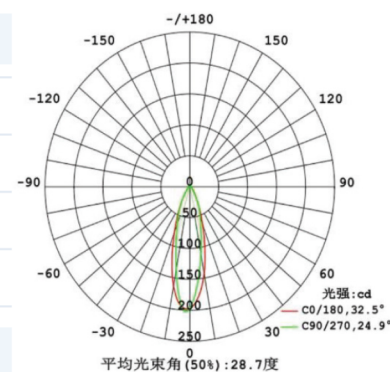



UNDERGROUND LIGHT

PRODUCT INFORMATION	
---------------------	--

Power	2 * 9 w
Name	LED underground light
Size	Ø 150x90mm

SPECIFICATION	
---------------	--

voltage	AC 220V
Color temperature	3000k/4000k/6500k
Beam angle	45°
LM/W	150-160LM/W
Ra	≥ 80
IP RATING	IP65

PRODUCT APPEARANCE	
--------------------	--

Body color	Black
------------	-------

Fixture Material stainless steel panel+ die-casting Aluminum+ tempered glass

DATE	2025-10-21
------	------------



✕


INNER PACKING SIZE	OUTER PACKING SIZE	PCS/CTN
15.5x10x15.5CM	32x50x32CM	20pcs

PRODUCT INFORMATION	
Power	2 * 7 w
Name	LED underground light
Size	Ø 130x90mm

SPECIFICATION	
voltage	AC 220V
Color temperature	3000k/4000k/6500k
Beam angle	45°
LM/W	150-160LM/W
Ra	≥ 80
IP RATING	IP65

PRODUCT APPEARANCE	
Body color	Black
Fixture Material	stainless steel panel+ die-casting Aluminum+ tempered glass

DATE	2025-10-21
------	------------

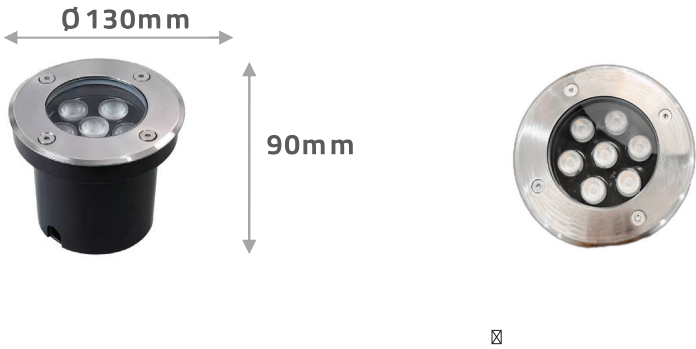

INNER PACKING SIZE	OUTER PACKING SIZE	PCS/CTN
13.5x9.5x13.5CM	28x50x28CM	20pcs




DOWN LIGHT

PRODUCT INFORMATION	
Power	7 w
Name	LED downlight
Size	Ø85x64.5mm
SPECIFICATION	
voltage	AC 220V
Color temperature	3000k/4000k/6000k
Beam angle	15°/24°/36°
LM/W	110-120LM/W
Ra	≥ 90
Hole size	75mm
PF	>0.9
PRODUCT APPEARANCE	
Body color	white
Fixture Material	Aluminum
DATE	2025-10-21



INNER PACKING SIZE	OUTER PACKING SIZE	PCS/CTN
85x64x85CM	44.5x18x35CM	50pcs

PRODUCT INFORMATION	
Power	12 w
Name	LED downlight
Size	Ø82.5x85mm
SPECIFICATION	
voltage	AC 220V
Color temperature	3000k/4000k/6000k
Beam angle	15°/24°/36°
LM/W	110-120LM/W
Ra	≥ 90
Hole size	75mm
PF	>0.9
PRODUCT APPEARANCE	
Body color	gray
Fixture Material	Aluminum
DATE	2025-10-21

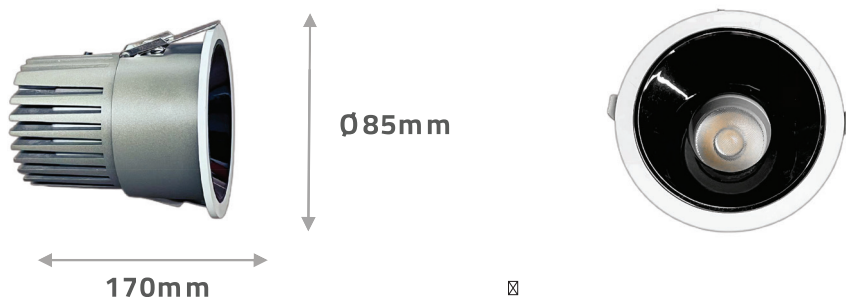

INNER PACKING SIZE	OUTER PACKING SIZE	PCS/CTN
83x85.5x83CM	43.5x18x67CM	50pcs



Product Name

اسم المنتج

LED SPOT LIGHT

Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Aluminum Frame- Die cast housing
- Glass with Diffuser

Product Name	LED Spot Light	الكشاف
Model	CMC-Spot-30	الموديل
Power	30 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
Warranty	3 Year	الضمان



Product Name

اسم المنتج

LED SPOT LIGHT

Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Aluminum Frame- Die cast housing
- PS Diffuser

Product Name	LED Spot Light	الكشاف
Model	CMC-Spot-PS-30	الموديل
Power	30 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
Warranty	3 Year	الضمان

DOWN LIGHT & SPOT LIGHT

Picture	Product Model	Power	CCT	CRI	Size	Opening Size (mm)	Beam Angle	IP
	ZD-D01	SMD-30W	6500k	≥90	D225	195	90°	20
		SMD-20W	6500k	≥90	D195	165	90°	20
		COB-18W	6500k	≥90	D168	145	60°	20
		COB-12W	6500k	≥90	D135	115	60°	20
		COB-10W	6500k	≥90	D110	95	60°	20
		SMD-7W	6500k	≥90	D95	75	90°	20
	S-LR	COB-10W	4000K	≥90	D90*H95	75	24°	20
	DY-Y8	D225	4000K	≥90	D83*62	75	24°	54-65
	DY-Y6	SMD-12W	6500k	≥90	D83*H42	75	90°	20
		SMD-18W	6500k	≥90	D104*H44	95	90°	20
		SMD-25W	6500k	≥90	D134*H46	115	90°	20
	DY-L1	SMD-12W	6500k	≥90	D90*45	75	55°	54-65
		SMD-18W	6500k	≥90	D90*45	95	55°	54-65
		SMD-24W	6500k	≥90	D140*55	115	55°	54-65
		SMD-35W	6500k	≥90	D165*60	145	55°	54-65



FACADE LIGHT



1. 50W LED FLOOD LIGHT

General Information

Product Name	50W LED Flood Light
Product Size	190 * 190 * 139 mm
Range of Application	Building lighting, backlighting of various sizes of planes, etc.

Lighting Resource




LED Model / Chip	CREE / OSRAM / PHILIPS / Other
Power	24 pcs * 2.08W = 50W
Color Temperature	3000K
Light Efficiency	120 lm/W

Fixture & Electrical Equipment

Beam Angle	10° Lens Reflector Cup
Body Material / Color	Die-casting aluminum, Sand Gray
Lamp Lens Material / Color	Tempered glass
IP Class	IP65
Rated Power	50W
Light Output Ratio (LOR)	70 lm/W
Input Voltage	DC24V
Installation Way	Integration (driver inside)
Power Factor	PF: 1
Definition / Control	Always On
Adjusted Angle	90° Adjustable

Control & Packaging

Control & Others	DC24V Switching Power Supply
Product Weight	2.58 kg
Package Type	K=A
Packing Size / Quantity	43.5 * 33.5 * 43.5 cm 8 PCS/ctn
Gross Weight	22.7 kg

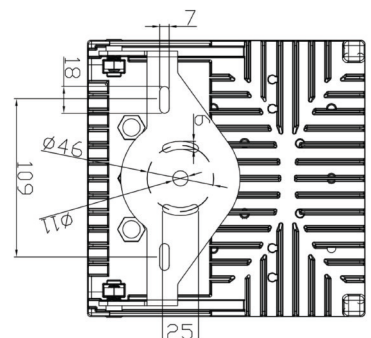

2. 8W LED FLOOD LIGHT

General Information

Product Name	8W LED Flood Light
Product Size	60 * 60 * 135 mm
Range of Application	Building lighting, backlighting of various sizes of planes, etc.

Lighting Resource




LED Model / Chip	CREE / OSRAM / PHILIPS / Other
Power	4 pcs * 2W = 8W
Color Temperature	3000K
Light Efficiency	120 lm/W

Fixture & Electrical Equipment

Beam Angle	10° Lens Reflector Cup
Body Material / Color	Die-casting aluminum, Sand Gray
Lamp Lens Material / Color	Tempered glass
IP Class	IP65
Rated Power	8W
Light Output Ratio (LOR)	70 lm/W
Input Voltage	DC24V
Installation Way	Integration (driver outside)
Power Factor	PF: 1
Definition / Control	Always On
Adjusted Angle	180° Adjustable

Control & Packaging

Control & Others	DC24V Switching Power Supply
Product Weight	0.4 kg
Package Type	K=A
Packing Size / Quantity	22 * 22 * 30 cm 50 PCS/ctn
Gross Weight	22 kg

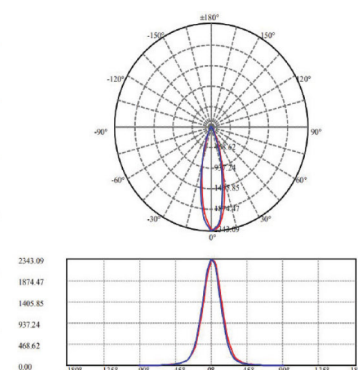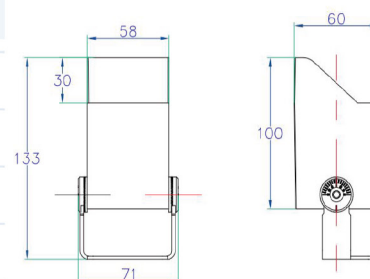

3. 10W WALL WASHER LIGHT


General Information

Product Name	10W Wall Washer Light
Product Size	1000 * 25 * 36 mm
Range of Application	Building lighting, backlighting of various sizes of planes, etc.






Lighting Resource

LED Model / Chip	OSRAM / PHILIPS
Power	48 pcs * 0.208W = 10W
Color Temperature	3000K
Light Efficiency	120 lm/W



Fixture & Electrical Equipment

Beam Angle	120°
Body Material / Color	Aluminum Profile, Sand Gray
Lamp Lens Material / Color	PC Cover
IP Class	IP65
Rated Power	10W
Light Output Ratio (LOR)	50 lm/W
Input Voltage	DC24V
Installation Way	Integration (driver outside)
Power Factor	PF: 1
Definition / Control	Single color always on



Control & Packaging

Control & Others	DC24V Switching Power Supply
Product Weight	0.5 kg
Package Type	K=A
Packing Size / Quantity	102 * 26 * 23 cm 32 PCS/ctn
Gross Weight	18 kg



FOR LIGHTING

HIGH BAY LIGHT



Product Name

اسم المنتج

LED HIGH BAY LIGHT PHILIPS

Specification

المواصفات

- 150 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Die cast housing
- PC Lens

- ١٥٠ ليومن لكل وات
- درجة اللون ٦٥٠٠ - ٣٥٠٠ كلفن
- جسم الومنيوم
- عدسة من البولي كربونيت

Product Name	LED High Bay Light	الكشاف
Model	CMC-H001-PH	الموديل
Power	100 - 150 - 200 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	150 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
Warranty	5 Year	الضمان
IP	65	درجة الحماية



اسم المنتج	Product Name
LED HIGH BAY LIGHT	

المواصفات	Specification
100 ليومن لكل وات - درجة اللون 3000-6000 كلفن - جسم الومنيوم - عدسة من البولي كربونيت	100 Lumen per Watt Output 6500K—3500K Color Temperature - Die cast housing - PC Lens

الكشاف	LED High Bay Light	Product Name
الموديل	CMC-H002	Model
القدرة	100 - 150 - 200 W	Power
معامل القدرة	0.95	Power Factor
الكفاءة	100 Lm/w	Lm/W
معامل تمييز اللون	75	CRI
الضمان	2 Year	Warranty
درجة الحماية	65	IP



Product Name

اسم المنتج

LED HIGH BAY LIGHT

Specification

المواصفات

- 150 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Die cast housing
- PC Lens

- ١٣٠ ليومن لكل وات
- درجة اللون ٦٥٠٠ - ٣٥٠٠ كلفن
- جسم الومنيوم
- عدسة من البولي كربونيت

Product Name	LED High Bay Light	الكشاف
Model	CMC-H003	الموديل
Power	100 - 150 - 200 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	130 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
Warranty	3 Year	الضمان
IP	65	درجة الحماية



Product Name

اسم المنتج

HIGH BAY-HY

Power	100 - 150 - 200 w	القدرة
Input Voltage	AC100-277V	الفولت
LED CHIPS	3030	الليد
COLOR	3000k - 6000k	درجة اللون
Ra	>80	معامل تمييز اللون
LM/W	130-140	الكفاءة
BEAM ANGEL	>90°	زاوية الاضاءة
WARRANTY	3 years	الضمان



INDOOR LIGHT



Product Name

اسم المنتج

LED OPAL TUBE LIGHT

Specification

المواصفات

- 110 Lumen per Watt Output
- 6500K Color Temperature
- Plastic

- 110 ليومن لكل وات
- درجة اللون 6500 كلفن
- جسم بلاستيك

Product Name	LED Tube Light	الكشاف
Model	CMC-T8-PI	الموديل
Power	9 - 18 W	القدرة
Power Factor	0.95/0.6	معامل القدرة
Lm/W	110 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
Length	60 - 120 cm	الطول



Product Name

اسم المنتج

LED ALUMINUM TUBE LIGHT

Specification

المواصفات

- 110 Lumen per Watt Output
- 6500K Color Temperature
- Extrusion aluminum with pc cover

Product Name	LED Tube Light	الكشاف
Model	CMC-T8-AL	الموديل
Power	9 - 18 - 24 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	110 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
Length	60 - 120 - 150 cm	الطول



Product Name

اسم المنتج

LED PANEL LIGHT 30*60


Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K Color Temperature
- Aluminum Frame

- ١٠٠ ليومن لكل وات
- درجة اللون ٦٥٠٠ كلفن
- فريم الألمنيوم

Product Name	LED Panel Light	الكشاف
Model	CMC-Slim3060	الموديل
Power	24 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
IP	43	IP
Warranty	3 Year	الضمان

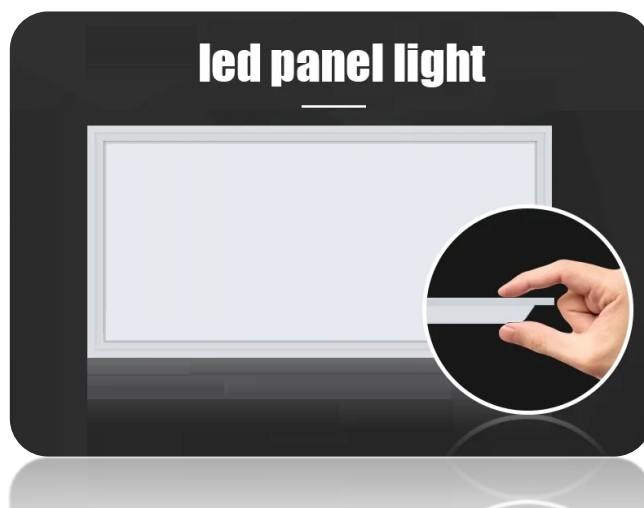

Product Name

اسم المنتج

LED PANEL LIGHT 60*60

Specification

المواصفات

- 95 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Aluminum Frame
- Heavy Duty Metal Housing

- ٩٥ ليومن لكل وات
- درجة اللون ٦٥٠٠ - ٣٥٠٠ كلفن
- فريم الألمنيوم
- جسم مصنوع من الصاج يتحمل الاجهادات

Product Name	LED Panel Light	الكشاف
Model	CMC-B6060	الموديل
Power	48 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	95 Lm/w	الكفاءة
CRI	75	معامل تمييز اللون
IP	43	IP
Warranty	1 Year	الضمان



Product Name

اسم المنتج

LED PANEL LIGHT 60*60

Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K Color Temperature
- Aluminum Frame

- ١٠٠ ليومن لكل وات
- درجة اللون ٦٥٠٠ كلفن
- فريم الألمنيوم

Product Name	LED Panel Light 60*60	الكشاف
Model	CMC-B6060	الموديل
Power	48 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
IP	43	IP
Warranty	3 Year	الضمان



Product Name

اسم المنتج

LED PANEL LIGHT 30*120


Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K Color Temperature
- Aluminum Frame

- ١٠٠ ليومن لكل وات
- درجة اللون ٦٥٠٠ كلفن
- فريم الألمنيوم

Product Name	LED Panel Light 30*120	الكشاف
Model	CMC-B30120	الموديل
Power	48 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
IP	43	IP
Warranty	3 Year	الضمان

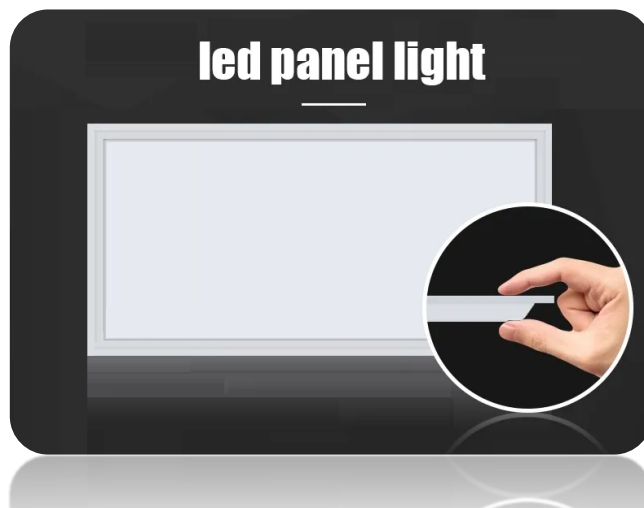

Product Name

اسم المنتج

LED PANEL LIGHT 60*120


Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Aluminum Frame
- Heavy Duty Metal Housing

- ١٠٠ ليومن لكل وات
- درجة اللون ٣٥٠٠-٦٥٠٠ كلفن
- فريم الألمنيوم
- جسم مصنوع من الصاج يتحمل الاجهادات

Product Name	LED Panel Light	الكشاف
Model	CMC-B60120	الموديل
Power	90 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
IP	43	IP
Warranty	3 Year	الضمان

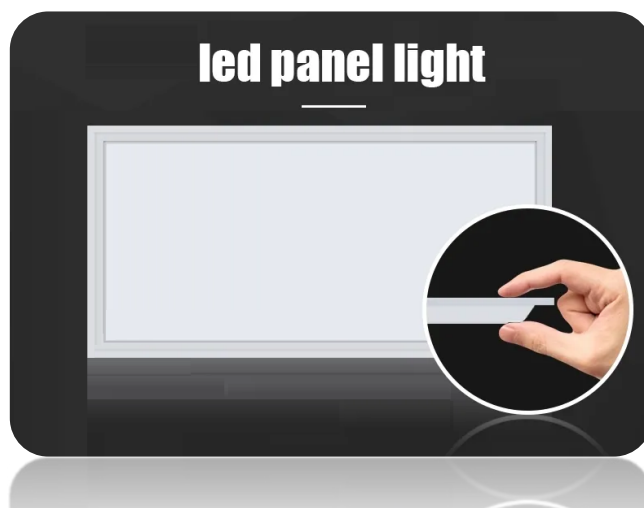

Product Name

اسم المنتج

LED PANEL LIGHT 60*60


Specification

المواصفات

- 120 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Aluminum Frame
- Heavy Duty Metal Housing
- Osram Driver & Chips

- ١٢٠ ليومن لكل وات
- درجة اللون ٦٥٠٠-٣٥٠٠ كلفن
- فريم الألمنيوم
- جسم مصنوع من الصاج يتحمل الاجهادات
- شيب ودرايفر اوزرم

Product Name	LED Panel Light	الكشاف
Model	CMC-OS6060	الموديل
Power	44 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	120 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
IP	43	IP
Warranty	5 Year	الضمان

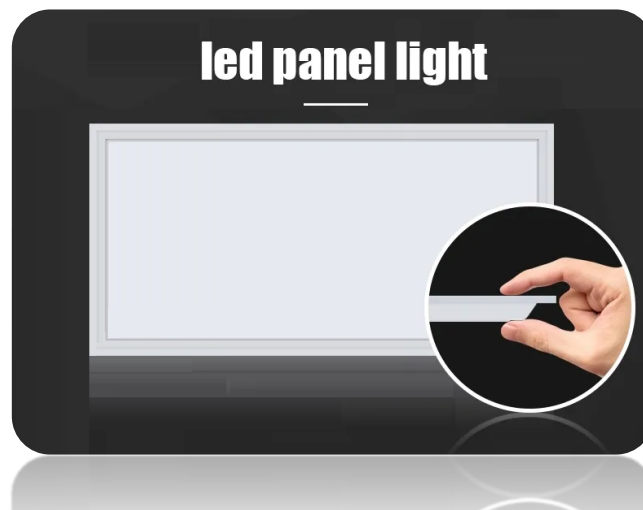

Product Name	اسم المنتج
LED PANEL LIGHT 60*60	

Specification	المواصفات
120 Lumen per Watt Output 6500K—3500K Color Temperature - Aluminum Frame - Heavy Duty Metal Housing - Philips Driver & Chips	120 ليومن لكل وات - درجة اللون 3500-6500 كلفن - فريم الألمنيوم - جسم مصنوع من الصاج يتحمل الاجهادات - شيب ودرايفر فليبس

Product Name	LED Panel Light	الكشاف
Model	CMC-PH6060	الموديل
Power	44 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	120 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
IP	43	IP
Length	5 Year	الضمان



Product Name

اسم المنتج

LED SQUARE SPOT LIGHT

Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Aluminum Frame- Die cast housing
- Glass with Aluminum reflector

Product Name	LED Square Spot Light	الكشاف
Model	CMC-SMD-40	الموديل
Power	40 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
Warranty	3 Year	الضمان



Product Name

اسم المنتج

LED TRACK LIGHT

Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Aluminum Frame- Die cast housing
- PC Lens

- ١٠٠ ليومن لكل وات
- درجة اللون ٦٥٠٠ - ٣٥٠٠ كلفن
- جسم الألمنيوم
- عدسة من البولي كاربونيت

Product Name	LED Track Light	الكشاف
Model	CMC-Track	الموديل
Power	20 - 30 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
Warranty	3 Year	الضمان

STANDARD TRACK LIGHT

Picture	Product Model	Power	CCT	CRI	SIZE	Beam Angle
	ZD-STF1	10W	4000K	≥90	50*100mm	24°
		20W	4000K	≥90	60*135mm	24°
		30W	4000K	≥90	80*150mm	24°
		40W	4000K	≥90	90*178mm	24°
	ZD-STT1	10W	4000K	≥90	55*135mm	≥90
		18W	4000K	≥90	65*165mm	15-60°
		25W	4000K	≥90	75*170mm	15-60°
	TP-TA1-S	5LED	4000K	≥90		24°
		15LED	4000K	≥90		24°
	TP-TA1-F	20W	4000K	≥90		120°
		40W	4000K	≥90		120°



STREET LIGHT



Product Name

اسم المنتج

LED STREET LIGHT COB

Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Die cast housing
- Toughened Glass With Aluminum Reflector

- 100 ليومن لكل وات
- درجة اللون - 6500 3500 كلفن
- جسم الومنيوم
- عدسة من الزجاج مع عاكس الومنيوم

Product Name	LED Street Light	الكشاف
Model	CMC-S001-COB	الموديل
Power	50 - 100 - 150 - 200 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	75	معامل تمييز اللون
Warranty	1 - 3 Year	الضمان



Product Name

اسم المنتج

LED STREET LIGHT R

Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Die cast housing
- PC Lens

- ١٠٠ ليومن لكل وات
- درجة اللون ٦٥٠٠ - ٣٥٠٠ كلفن
- فريم الومنيوم
- جسم مصنوع من الصاج يتحمل الاجهادات

Product Name	LED Street Light	الكشاف
Model	CMC-S004-R	الموديل
Power	50 - 100 - 150 - 200 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	75	معامل تمييز اللون
Warranty	1 Year	الضمان



Product Name

اسم المنتج

LED STREET LIGHT L

Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Die cast housing
- PC Lens

Product Name	LED Street Light	الكشاف
Model	CMC-S0011-L	الموديل
Power	50 - 100 - 150 - 200 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	75	معامل تمييز اللون
Warranty	1 Year	الضمان



Product Name

اسم المنتج

LED STREET LIGHT HOLLOW

Specification

المواصفات

- 120 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Die cast housing
- Toughened Glass With Aluminum Reflector

Product Name	LED Street Light	الكشاف
Model	CMC-S002-H	الموديل
Power	100 - 150 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	120 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
Warranty	3 Year	الضمان



Product Name

اسم المنتج

LED STREET LIGHT SMD MATRIX

Specification

المواصفات

- 120 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Extrusion Aluminum housing
- PC Lens

Product Name	LED Street Light	الكشاف
Model	CMC-S010-MATTRIX	الموديل
Power	100 - 150 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	120 Lm/w	الكفاءة
CRI	80	معامل تمييز اللون
Warranty	3 Year	الضمان



Product Name

اسم المنتج

LED STREET LIGHT

Specification

المواصفات

- 100 Lumen per Watt Output
- 6500K - 3500K Color Temperature
- Die cast housing
- PC Lens

Product Name	LED Street Light	الكشاف
Model	CMC-S003-N	الموديل
Power	100-120-150 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	100 Lm/w	الكفاءة
CRI	75	معامل تمييز اللون
Warranty	3 Year	الضمان



Product Name

اسم المنتج

LED STREET LIGHT

Specification

المواصفات

- 150 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Die-Cast Housing
- PC Lens + Glass

Product Name	LED Street Light	الكشاف
Model	CMC-S005-M	الموديل
Power	100 - 150 - 200 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	150 Lm/w	الكفاءة
Driver	Philips / CMC / 5 Stage Step driver	الدرايفر
CRI	80	معامل تمييز اللون
Warranty	3/5 Year	الضمان



Product Name

اسم المنتج

LED STREET LIGHT

Specification

المواصفات

- 150 Lumen per Watt Output
- 6500K—3500K Color Temperature
- Die-Cast Housing
- PC Lens + Glass

Product Name	LED Street Light	الكشاف
Model	CMC-S006-M	الموديل
Power	100 - 150 - 200 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	150 Lm/w	الكفاءة
Driver	Philips / CMC / 5 Stage Step driver	الدرايفر
CRI	80	معامل تمييز اللون
Warranty	3/5 Year	الضمان



Product Name

اسم المنتج

LED STREET LIGHT

Specification

المواصفات

- 150 Lumen per Watt Output
- 6500K - 3500K Color Temperature
- Die-Cast Housing
- PC Lens + Glass

Product Name	LED Street Light	الكشاف
Model	CMC-S007-M	الموديل
Power	100 - 150 - 200 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	150 Lm/w	الكفاءة
Driver	Philips / CMC / 5 Stage Step driver	الدرايفر
CRI	80	معامل تمييز اللون
Warranty	3/5 Year	الضمان



Product Name

اسم المنتج

LED STREET LIGHT

Specification

المواصفات

- 115 Lumen per Watt Output
- 6500K - 3500K Color Temperature
- Die-Cast Housing
- PC Lens + Glass

Product Name	LED Street Light	الكشاف
Model	CMC-S008-F	الموديل
Power	100-105-120 -150 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	115 Lm/w	الكفاءة
CRI	70	معامل تمييز اللون
Warranty	3 Year	الضمان



Product Name

اسم المنتج

LED STREET LIGHT


Specification

المواصفات

- 115 Lumen per Watt Output
- 6500K - 3500K Color Temperature
- Die-Cast Housing
- PC Lens + Glass

Product Name	LED Street Light	الكشاف
Model	CMC-S009-F	الموديل
Power	100-105-120 -150 W	القدرة
Power Factor	0.95	معامل القدرة
Lm/W	115 Lm/w	الكفاءة
CRI	70	معامل تمييز اللون
Warranty	3 Year	الضمان

- 100w-300w
- 140-150LM/W
- 3-year or 5-year warranty
- Compatible with sensing function
- Complete set of accessoriesuch as lampshade/bracket
- Protection Rank : IP 65
- Material: Aluminium
- Power factor >0.9
- Start at minus 100 degrees Celsius

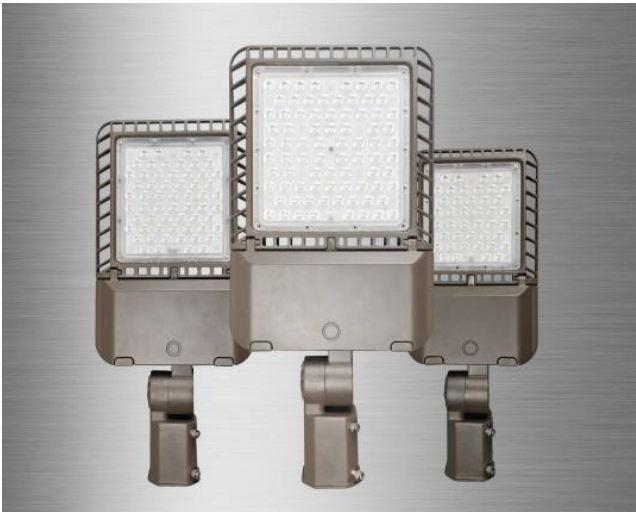


Technicat parameters:

Model	Power (± 5%)	Input Voltage	Efficiency LMW (± 5%)	CCT	Ra	Beam Angle	Product Size (mm)
J BJ -B3	100W	AC 100-277V /50/60Hz	(140-150LM /W)	3000K /6500K	≥ 80	70°*140°	520*210*67mm
J BJ -B3	150W	AC 100-277V /50/60Hz	(140-150LM /W)	3000K /6500K	≥ 80	70°*140°	570*250*70mm
J BJ -B3	200W	AC 100-277V /50/60Hz	(140-150LM /W)	3000K /6500K	≥ 80	70°*140°	590*280*75mm
J BJ -B3	300W	AC 100-277V /50/60Hz	(140-150LM /W)	3000K /6500K	≥ 80	70°*140°	680*300*80mm




WIRE / WIRELESS STRIP LIGHT

- Wire 2835 double row 180 D/M
- Wireless double row 180 D/M 20cm/1m cutting
- Wireless single row 180 D/M 20cm/1m cutting

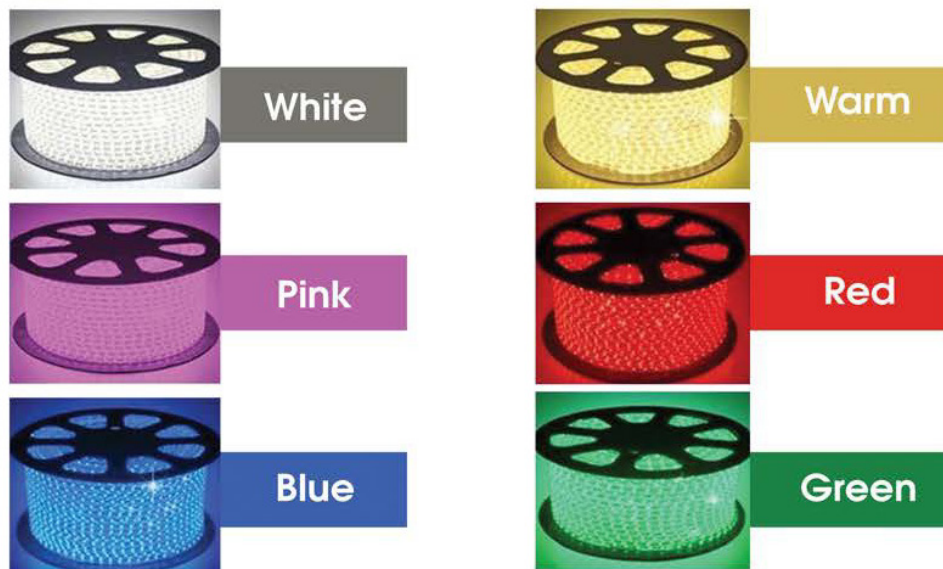




DECORATIVE LIGHT

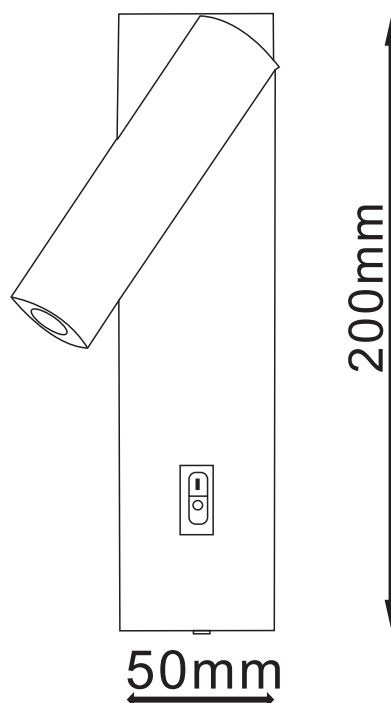


Rated Power	3W
Input Voltage	AC220V 60Hz
Driver	CMC
PF	PF>0.5
LED Chip	Bridgelux LED Chip
Luminous Flux	85-95LM/W
Color Temperature	3000K/4000K/6500K
CRI	>80
Beam Angle	30°

Dimmable	NO
Material	Aluminum + Iron
Body color	Black/white
Cutout Size	NO
IP Rating	IP 20
Lifetime	30,000 Hours
Operating Temp	-20°C~+40°C
Certification	CE, RoHS,CB
SIZE(cm)	L20 X W5 X H3CM

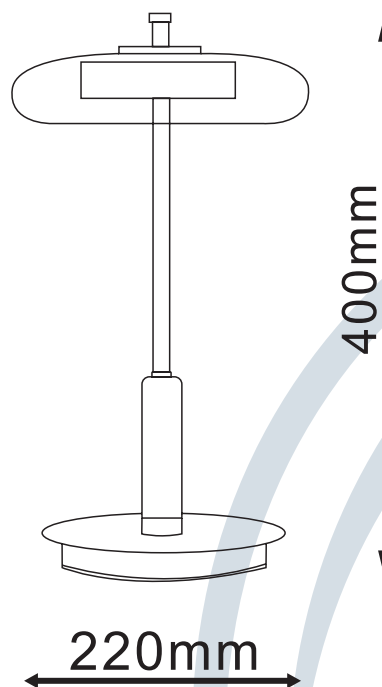


Rated Power	12W
Input Voltage	AC220V 60Hz
Driver	CMC
PF	PF>0.5
LED Chip	Bridgelux LED Chip
Luminous Flux	85-95LM/W
Color Temperature	3000K/4000K/6500K
CRI	>80
Beam Angle	80°

Dimmable	NO
Material	Walnut/Glass/Copper
Body color	Copper
Cutout Size	NO
IP Rating	IP 20
Lifetime	30,000 Hours
Operating Temp	-20°C~+40°C
Certification	CE, RoHS,CB
SIZE(cm)	W22 X H40CM

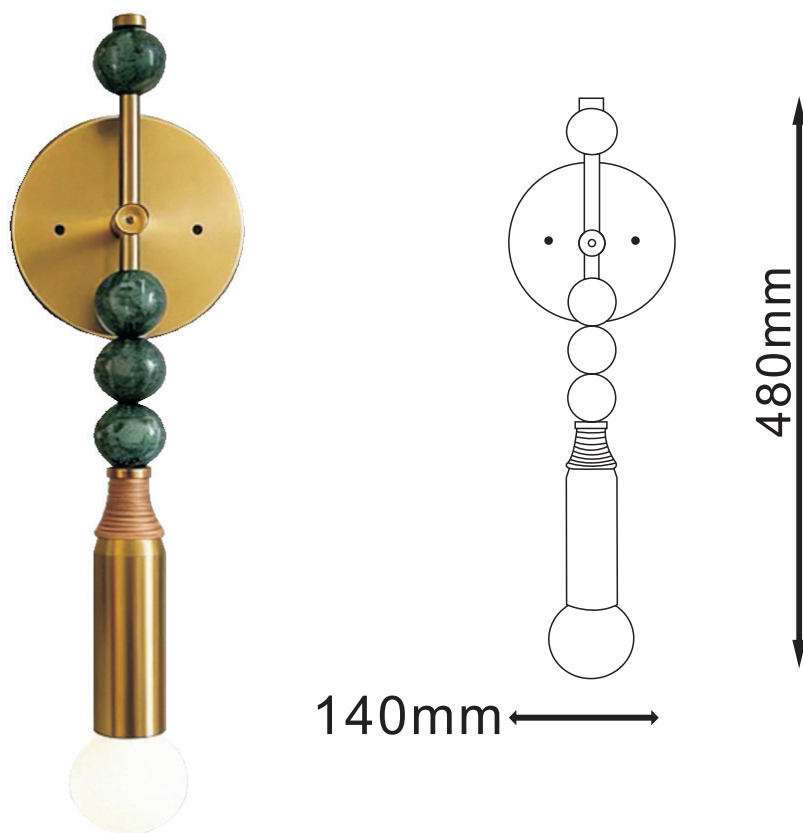

Rated Power	5W
Input Voltage	AC220V 60Hz
Driver	CMC
PF	PF>0.5
LED Chip	Bridgelux LED Chip
Luminous Flux	85-95LM/W
Color Temperature	3000K/4000K/6500K
CRI	>80
Beam Angle	120°

Dimmable	NO
Material	Hardware+Cave Stone
Body color	Copper
Cutout Size	NO
IP Rating	IP 20
Lifetime	30,000 Hours
Operating Temp	-20°C~+40°C
Certification	CE, RoHS,CB
SIZE(cm)	L48 X W14 X H11.5CM




140mm



480mm

Rated Power	5W
Input Voltage	AC220V 60Hz
Driver	CMC
PF	PF>0.5
LED Chip	Bridgelux LED Chip
Luminous Flux	85-95LM/W
Color Temperature	3000K/4000K/6500K
CRI	>80
Beam Angle	120°

Dimmable	NO
Material	Hardware+Cave Stone
Body color	Copper
Cutout Size	NO
IP Rating	IP 20
Lifetime	30,000 Hours
Operating Temp	-20°C~+40°C
Certification	CE, RoHS,CB
SIZE(cm)	L48 X W14 X H11.5CM

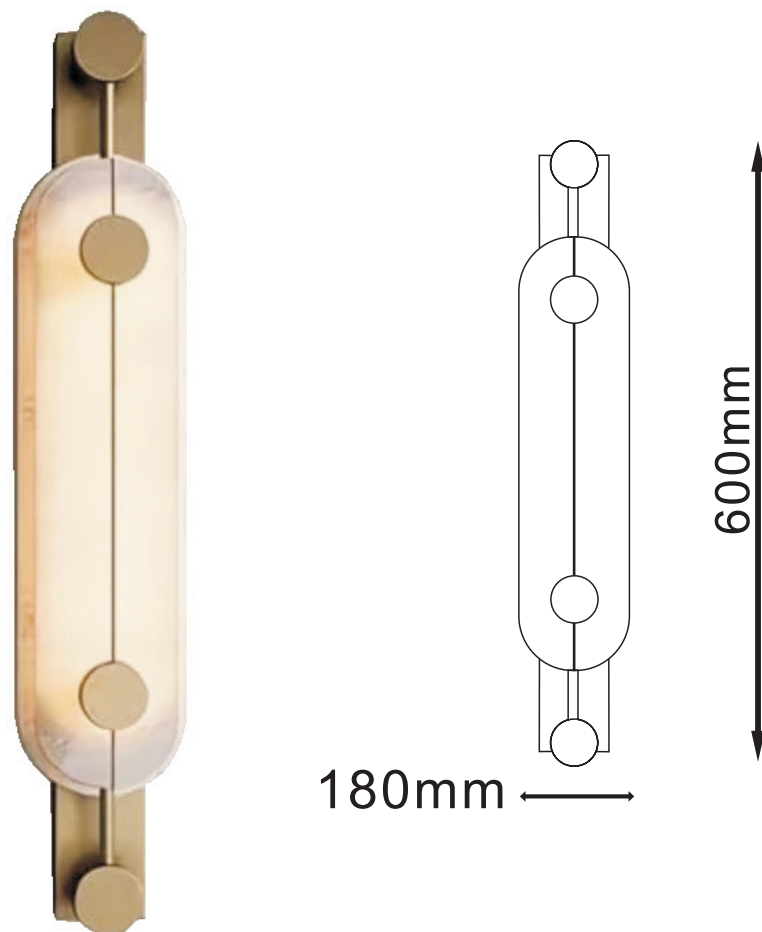

Rated Power	10W
Input Voltage	AC220V 60Hz
Driver	CMC
PF	PF>0.5
LED Chip	Bridgelux LED Chip
Luminous Flux	85-95LM/W
Color Temperature	3000K/4000K/6500K
CRI	>80
Beam Angle	120°

Dimmable	NO
Material	Hardware+Cave Stone
Body color	Copper
Cutout Size	NO
IP Rating	IP 20
Lifetime	30,000 Hours
Operating Temp	-20°C~+40°C
Certification	CE, RoHS,CB
SIZE(cm)	L60 X W18 X H11.5CM L80 X W18 X H11.5CM

TECHNICAL DATA SHEET

LED Architectural Up & Down Narrow Beam Wall Light



Application: Exterior architectural facade lighting for mall columns and feature elevations. Surface-mounted at the center of the column with concentrated, symmetrical vertical beams.

1. Product Identification

Manufacturer /Brand	CMC - Cairo Metal for Multiple Industries
Product Type	LED Architectural Wall Mounted Up & Down Light
Application	Exterior Facade / Mall Columns
Mounting	Surface mounted, centered on column
Optical Concept	Symmetrical Up & Down Narrow Beam

2. Technical Data

Parameter	Specification
Rated Power	36 W LED
Input Voltage	160-265V AC, 50 Hz PF>0.9
Light Source	High-efficiency SMD
Color Temperature	3000K Warm White
Color Rendering	CRI $\geq$ 80
Beam Angle	15° Narrow Beam
Light Distribution	Symmetrical Up & Down; concentrated straight beam
Driver	Constant-current LED driver; PF $\geq$ 0.90
Housing	Die-cast aluminum
BODY COLOR Finish	Black
Ingress Protection	Ip65 minimum
Impact Protection	Ik08 minimum
Operating Temperature	-20°C to +50°C
Dimensions (H x Ø)	300 x 145 mm (Height x Diameter)

Parameter	Specification
Installation	Complete with mounting bracket, fixing accessories and required components
Warranty	Minimum 3 years
Compliance	NO


3. Optical & Installation Requirements

- Narrow-beam optics shall produce a clean, visually defined vertical line on the facade with minimum lateral spill.
- Beam spread shall be selectable up to 15° according to the approved optical configuration.
- Upward and downward distributions shall be balanced and aligned with the architectural column.
- Final photometric performance shall be confirmed by the approved IES/LDT photometric file and shop drawing.

4. Consultant Submittal/ Approval

Product datasheet, sample, dimensions, mounting details and IES/DT photometric data shall be submitted for Consultant approval prior to procurement and installation.

NOTE: Proposed project specification. Final wattage, optics and photometric values shall be confirmed against the selected CMC luminaire model before formal submission

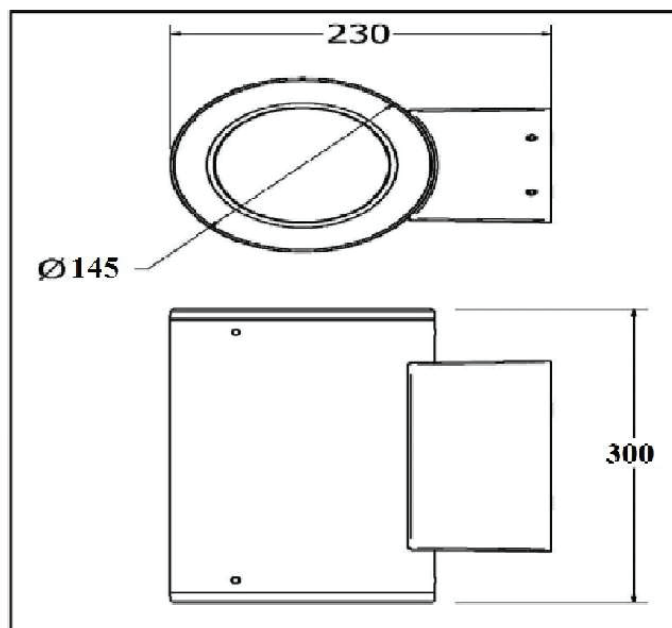

Dimensions

COSIGN



EMERGENCY

EXIT SIGN

Picture	Product Model	Power	Duration	Charge time	Battery Ni cad	Battery Li-ion
	LM-SG-8410NC / LM-SG-8410LI	2-8W	>3h	24h	Ni-Cad 3.6V 1800mAh	Li-ion 3.7V 1800mAh
		2-3W	>2h	24h	Ni-Cad 3.6V 900mAh	Li-ion 3.7V 1800mAh
		2-3W	>2h	24h	Ni-Cad 3.6V 900mAh	Li-ion 3.7V 1800mAh

EMERGENCY LIGHT

Picture	Product Model	Power	Duration	Charge time	Battery CAD	Battery Li-ion
	LM-SG-0417-LI	3-6W	>2h	24h	NI-CAD 3.6V 1800mAh	Li-ion 3.7v 1800 mAh
	LM-DN-8040CNC	1W-5W	>3h	24h	"NI-Cad SC 3.6V 1800mAh"	LifePO4 3.2V 1800mAh
	LM-DN-0818NC/LI	1W-5W	>3h	24h	"NI-Cad AA 3.6V 1000mAh"	Li-ion 3.7v 1200mAh
	LM-DN-0416LI-18W	4.5W-18W	>2h	24h		Li-ion 3.7v/7.4v 2600 mAh